
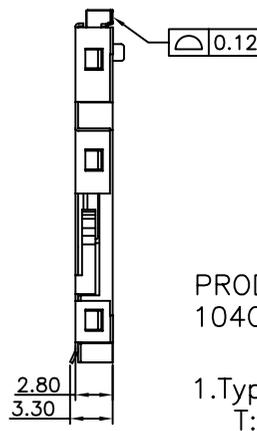
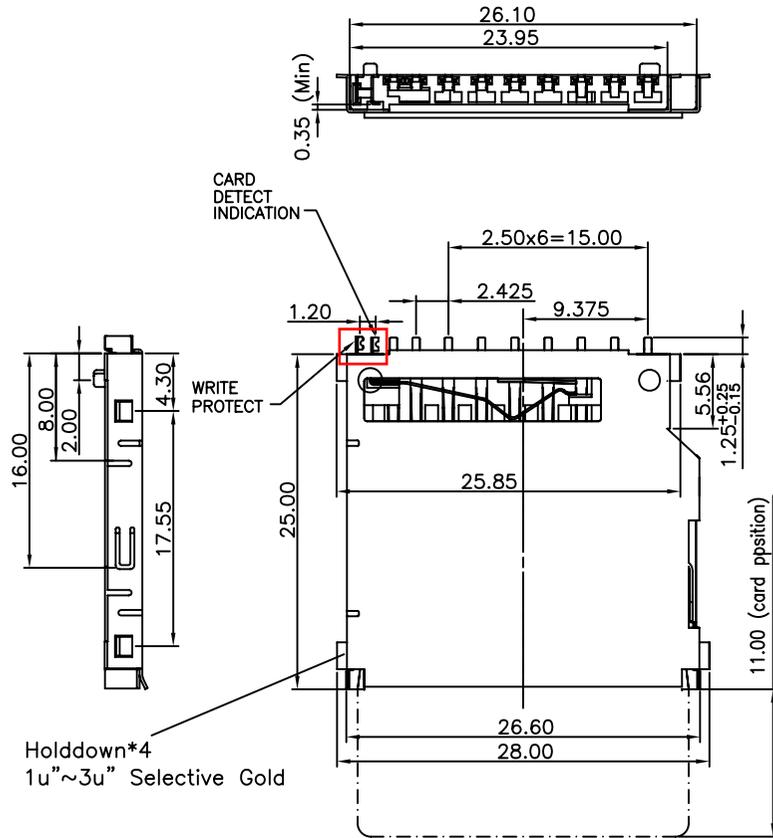




PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

SPECIFICATION
MATERIAL
 Insulator: LCP UL94V-0
 Contacts: Copper Alloy
 Shell: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 15u" Gold Plating
 Solder Tails Area: 100u"~200u" Tin(Lead Free)
ELECTRICAL
 Current Rating: 1 Amps Max.
 Contact Resistance: 100 mohms Max.
 Insulation Resistance: 1000 Mohms Min @ 500 VDC
MECHANICAL
 Mating Cycles: 10000 Cycles
 Temperature Range: -25°C To +85°C

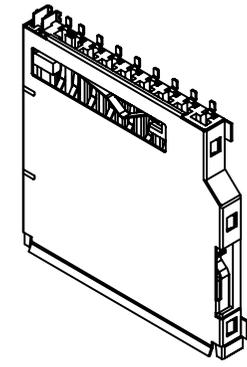

PRODUCT NUMBER:
 104C-T A A 0-R
 1 2 3 4

- 1.Type
T:Top Mount
- 2.Contact Plating
A:15u"Gold Plating
- 3.Stand Off
A:0mm
- 4.RoHS

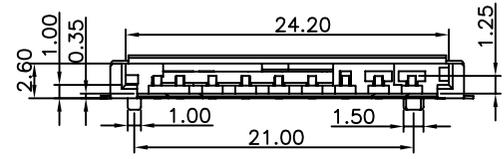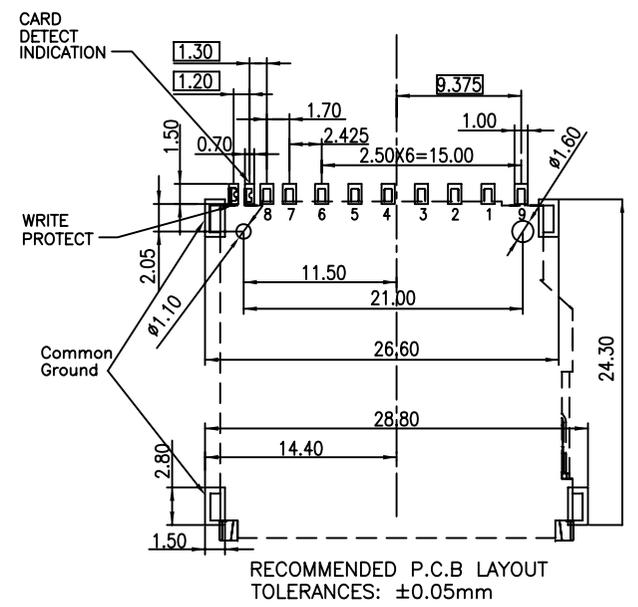

ATTEND TECHNOLOGY INC.
 www.attend.com.tw

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.3
.0	±0.25
.00	±0.20

SCALE:	AS SHOWN	UNIT:	mm
DRAWN	Willis	DATE	2011/08/01
CHECKED	Angel	DATE	2011/08/01
APPROVED	Ken	DATE	2011/08/01

DRAWN NAME:
SD Socket Top Mount

PRODUCT NO. 104C-TAA0-R

FILE NAME: 104C-TAA0-R_B_1

REV.	DESCRIPTION	DATE	SIZE
1			A4