


SIM CARD PINOUT		
PIN NO.	NAME	DESCRIPTION
C1	VCC	+5V OR 3.3V DC
C2	RST	CARD RESET (POTIONAL)
C3	CLK	CARD CLOCK
C4	AS	APPLICATION SPECIFIC
C5	GND	GROUND
C6	VPP	+21V DC
C7	I/O	IN/OUT
C8	AS	APPLICATION SPECIFIC

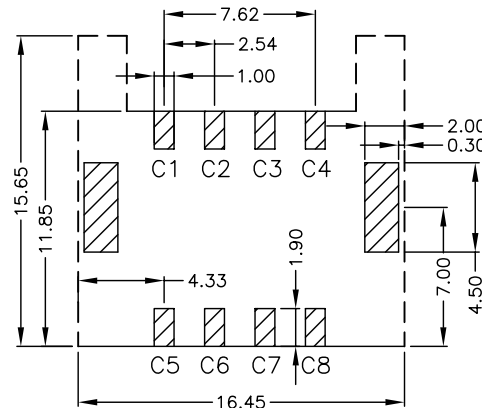

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
- TERMINAL : COPPER ALLOY.(t=0.15mm)
GOLD PLATED OVER NICKEL
- FORK : COPPER ALLOY. (t=0.20mm)
TIN PLATED OVER NICKEL

SPECIFICATION

- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

115C-B C 0 0-R
1 2 3

1.Type
B:8Pin

2.Contact Plating
C:Gold Flash

3.RoHS

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG. ±5
0. ±0.3
.0 ±0.25
.00 ±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2009/03/24

CHECKED / /

APPROVED / /

DATE SIZE A4 REV.



ATTEND TECHNOLOGY INC.

www.attend.com.tw

DRAWN NAME:
SIM Card Socket
w/Card holder

PRODUCT NO. 115C-BC00-R

FILE NAME: 115C-BC00-R_B_1

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	