



NO.	TITLE	MATERIAL	FINISH(OR COLOR)	QTY
1	HOUSING 1	LCP+30%GF,UL94 V-0	BLACK	1
2	HOUSING 2	LCP+30%GF,UL94 V-0	BLACK	1
3	TERMINAL1	C5210R-H,T=0.15±0.01	GLD PLATED	8
4	TERMINAL2	C5210R-H,T=0.15±0.01	GLD PLATED	8
5	SHELL	C2680R-H,T=0.15±0.01	NICKEL PLATED	1

**SPECIFICATION:**

- CURRENT RATING:0.5AMP MAX.
- DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE:500M Ω MIN AT 500V DC.
- CONTACT RESISTANCE:60m Ω MAX.
- OPERATING TEMPERATURE:-5°C~+85°C.
- MAX.PROCESSING TEMP:  
260+0/-5°C FOR 20~40 SECONDS.

MARKED "▼" ARE IMPORTANT DIMENSIONS.

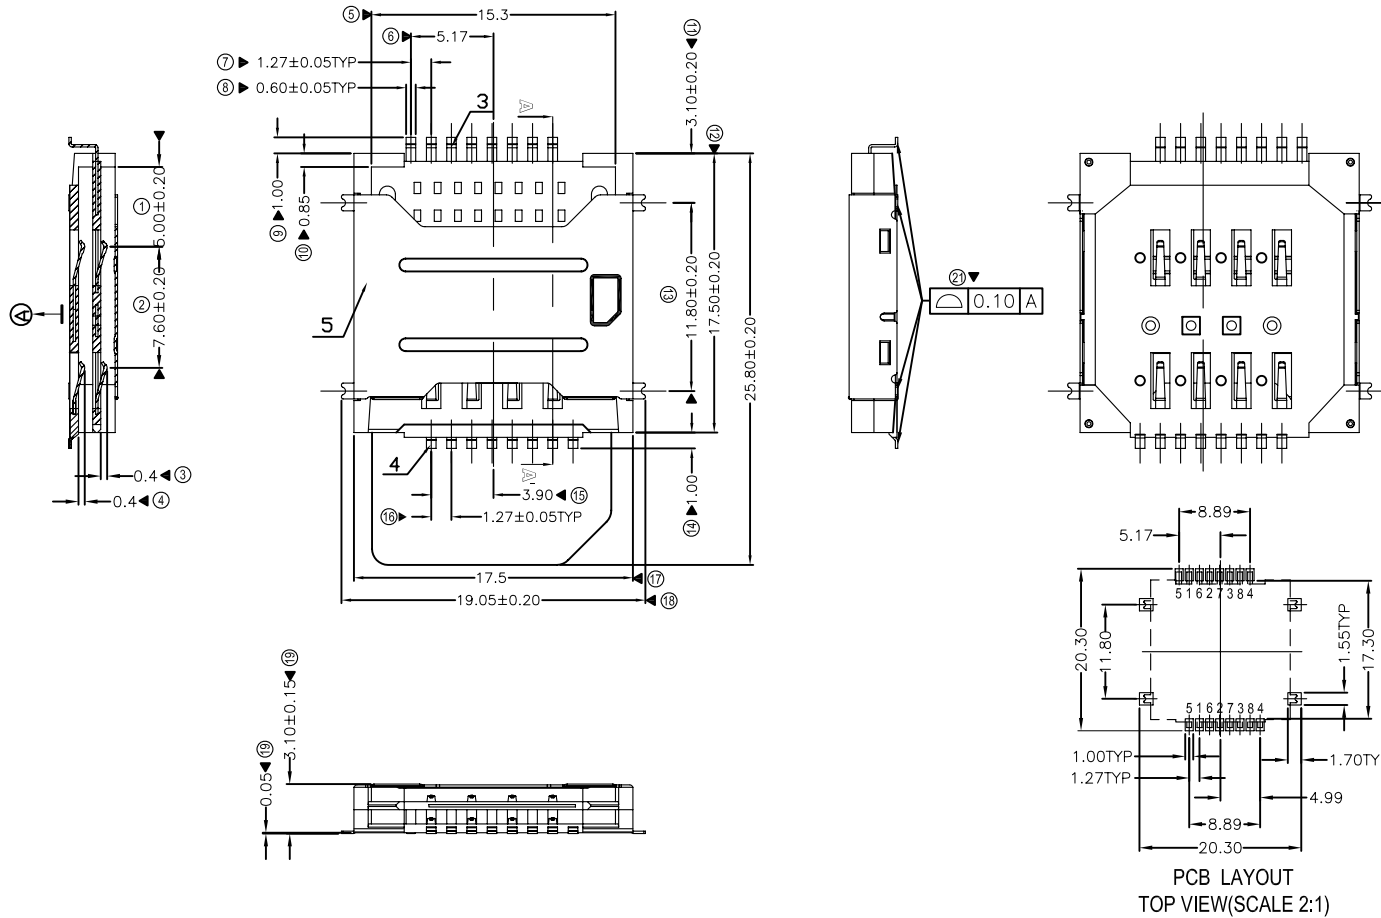

- C1 Supply voltage(VCC)
- C2 Reset(RST)
- C3 Clock(CLK)
- C4 Not used
- C5 Ground(GND)
- C6 Vpp
- C7 Input/output(I/O)
- C8 Not used

SIM CARD CIRCUIT  
TOP VIEW(SCALE 2:1)

Product Number	Description
115H-BC00	SIM Card Socket 8Pin Dual Port Type 5u " Gold Plating

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5
0.	±0.3
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2011/03/02

CHECKED Angel 2011/03/02

APPROVED Ken 2011/03/02

**Attend**  
ATTEND TECHNOLOGY INC.  
www.attend.com.tw

DRAWN NAME:  
SIM Card Socket Dual Port Type

PRODUCT NO. 115H-BC00

FILE NAME: 115H-BC00\_B\_4

1 REVISE: Housing

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	