




MATERIAL:

HOUSING : PBT (UL 94V-0).
 CONTACT : PHOSPHOR BRONZE.

SPECIFICATION:

VOLTAGE RATING : 50V DC MAX.
 CURRENT RATING : 0.5A MAX.
 OPERATING TEMPERATURE : -20°C ~ +80°C
 INSULATION RESISTANCE : 1000 MΩ MIN.
 CONTACT RESISTANCE : 100 MΩ MAX.

DIMENSIONS

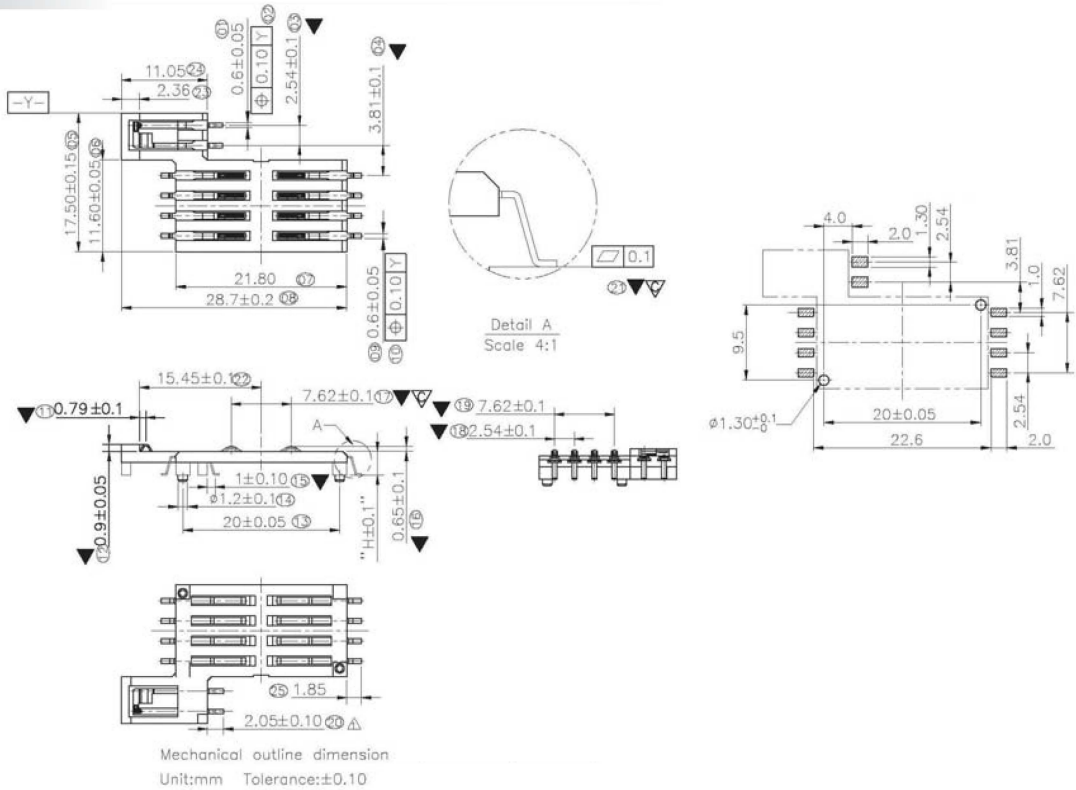

HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING	SWITCH	PROFILE
9008	8 8P	S S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"	R R: RIGHT SIDE L: LEFT SIDE	1 1: 1.4MM 2: 2.5MM 3: 3.0MM 4: 3.5MM 5: 4.3MM 6: 4.7MM