MATERIAL:

BASIC	: THERMOPLASTIC UL 94V-0.
COVER	: THERMOPLASTIC UL 94V-0.
CLUTCH	: COPPER ALLOY.

SPECIFICATION:

VOLTAGE RATING	: 50V DC MAX.
CURRENT RATING	: 0.5A MAX.
OPERATING TEMPERATURE	: -20°C ~ +80°C
INSULATION RESISTANCE	: 1000 MΩ MIN.
CONTACT RESISTANCE	: 100 MΩ MAX.

DIMENSIONS

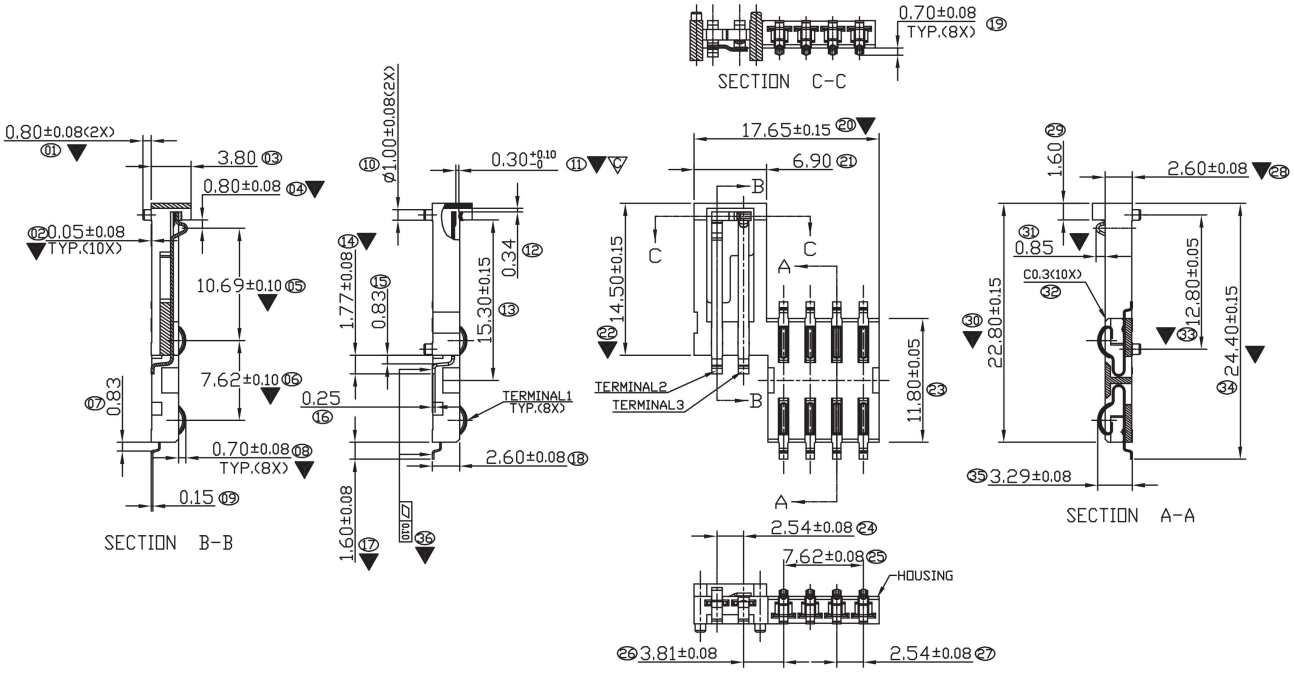

HOW TO ORDER

SERIES NO.	CONTACT NO.	PLATING	SWITCH	PROFILE
9009	8	S	L	2.6
	8P	S: SELECTIVE GOLD PLATED S1: SELECTIVE GOLD 15u" S2: SELECTIVE GOLD 30u"	L: LEFT SIDE	2.6MM

SoniTexx®