
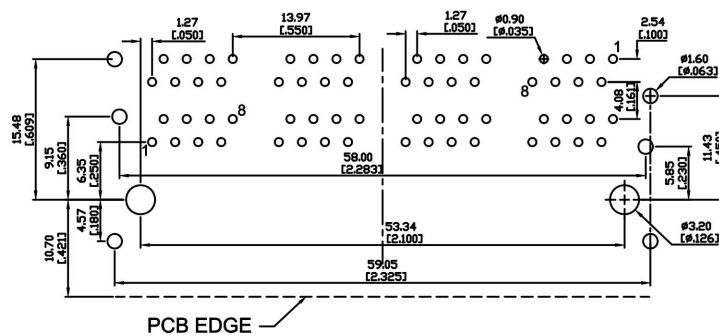


TOLERANCE (公差):  
 0.000 mm ± 0.075 mm  
 0.00 mm ± 0.15 mm  
 0.0 mm ± 0.25 mm

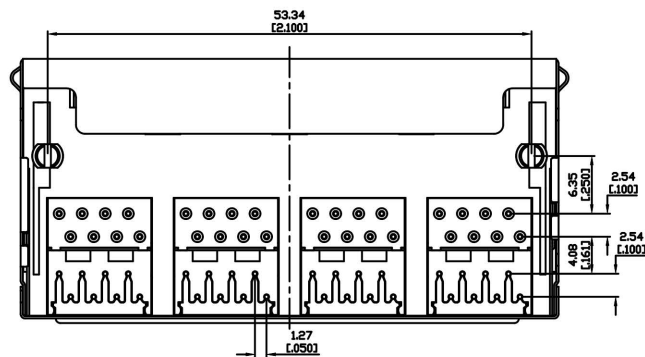

SUGGESTED PCB LAYOUT  
 TOP VIEW

Electrical Characteristics :  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

Material:  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 Shield : Brass, Nickel Plating.

PART NO : 8 2 8 8 S - B \* \* 5 - R

Positions →  
 Contacts →  
 Panel Ground →  
 Housing Color →  
 Ports →  
 Gold Plated  
 0 : Gold Flash  
 1 : 6u"  
 2 : 15u"  
 3 : 30u"  
 4 : 50u"

DOUBLE ROW SHIELDED  
 SIDE ENTRY PCB JACK

**SoniTexx**®