

USB 3.0 Female Dip 90° A Type

ROHS
COMPLIANT





Pb
Pb-Free

Specification:


- 1.Contact Resistance: 30 m Ohm Max.
- 2.Withstanding Voltage: 500V AC For 1 Minute.
- 3.Insulation Resistance: 100 MEGA ohms MIN.

Material and Finish:

- 1.Insulator Material: PBT UL94-V0,Blue
- 2.Contact Material: Brass (C2680-H) T=0.20.
- 3.Contact Area Plated: Gold 1~30u" Plated Over Nickel 50u".
- 4.Solder Area Plated: Tin Plated(80u" min Lead Free)
- 5.Connector Shell Material: Brass or SPCC T=0.30
- 6.Connector Shell Plated: Nickel 80u" Plated Over Cu 50u"

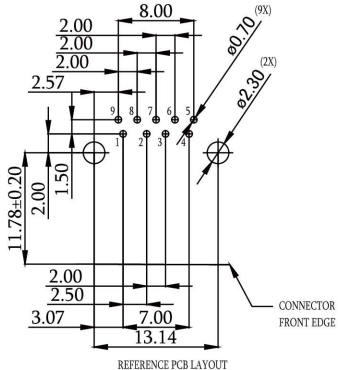

Part No.: USB-001-AU-3.0-L



SoniTexx®