

USB 3.0 Female Dip 90° B Type




1. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 1.8A AT 250V AC MIN
- d. OPERATING TEMPERATURE: -55°C - 85°C


2. INSERTION FORCE: 35N Max

EXTRACTION FORCE: 10N MIN INITIAL AND 8N MIN AFTER THE SPECIFIED





4	HOUSING	PBT	UL94V-0
3	SHELL	SPCC or Brass	OVEP-PIATING: Ni Or Au
2	5P TERMINAL	Brass T=0.2mm	OVEP-PIATING: Au Ni/Sn
1	4P TERMINAL	Phosphor Bronze T=0.2mm	OVEP-PIATING: Au Ni/Sn
ITEM	DESCRIPTION	MATERIAL	REMARKS



Part No.: USB-001-BU-3.0-L

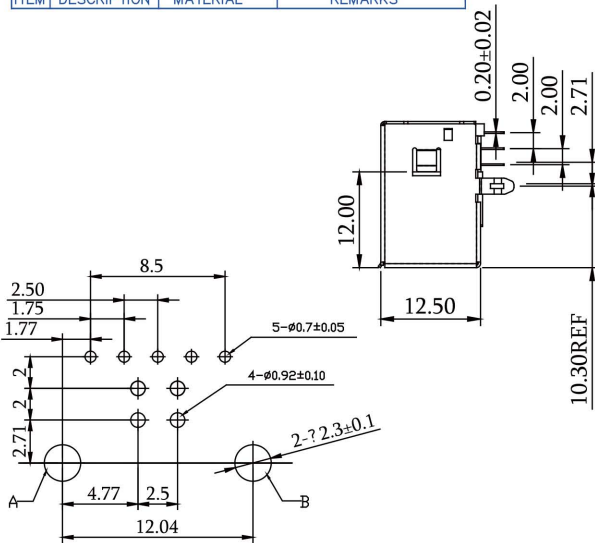

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
PCB LAYOUT TOLERANCE ± 0.05 (PCB T=1.6mm)

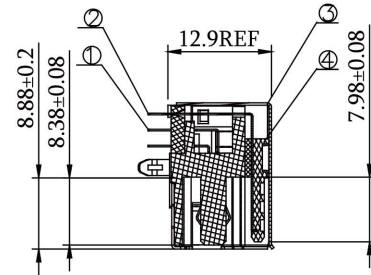

SECTION A-A