




USB 3.0 Female Dip 180° A Type



- 1. ELECTRICAL:
 - 1.1 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE : 1000 MEGAOHMS MIN. AT 500 VDC
- 2. MECHANICAL:
 - 2.1 DURABILITY : 5000 CYCLES MIN.
 - 2.2 MATING FORCE 3.5KGF MAX. UNMATING FORCE 1.0KGF MIN.
- 3. ENVIRONMENTAL:
 - OPERATION TEMPERATURE : -25°C~+85°C
- 4. CONTACT FINISH:
 - SELECTIVE 15μ" COLD PLATED OVER NICKEL



Part No.: USB-001K-AU-3.0-L

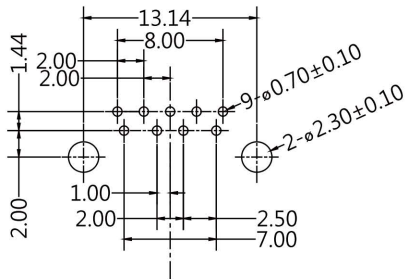

GENERAL TOLERANCES: ±0.05

