

USB 3.0 Female Solder A Type




1.MECHANICAL:




MATING: 35N MAX.
 WITHDRAWAL: 10N MIN.
 DURABILITY: 1500 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 100mA MAX
 VOLTAGE: 20mV MAX
 WITHSTANDING VOLTAGE: 100V AC
 CONTACT RESISTANCE: 30 mΩ MAX/50mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN



Part No.:USB-FS-AU-3.0-L

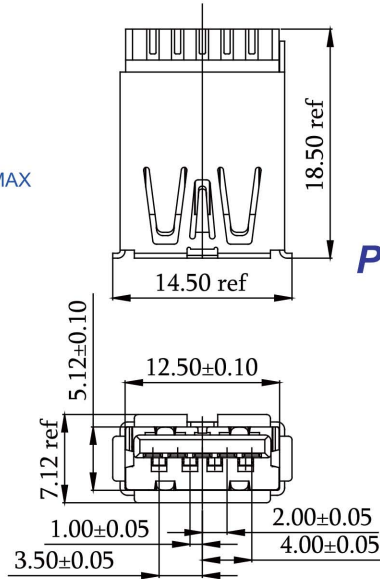

ITEM	PART NAME	Q'TY	Material
1	HOUSING	1	PBT+30%GF,BLUE
2	COVER	1	PBT+30%GF,BLUE
3	SHELL	1	C2680R-H,Ni80u'MIN
4	CONTACT1	4	C5191,GOLD 15U'
5	CONTACT2	5	C2680,GOLD 15U'